



[illegible]

FIG. 3

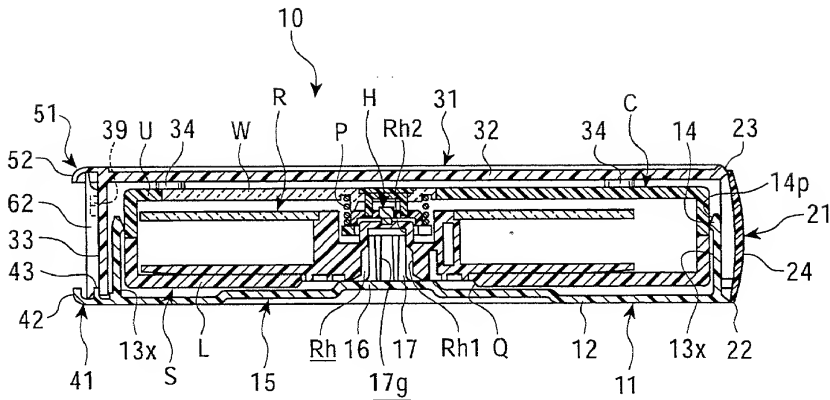


FIG. 4

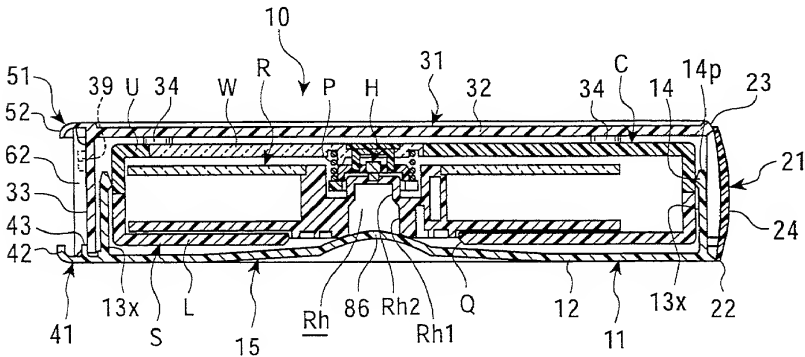


FIG. 5A

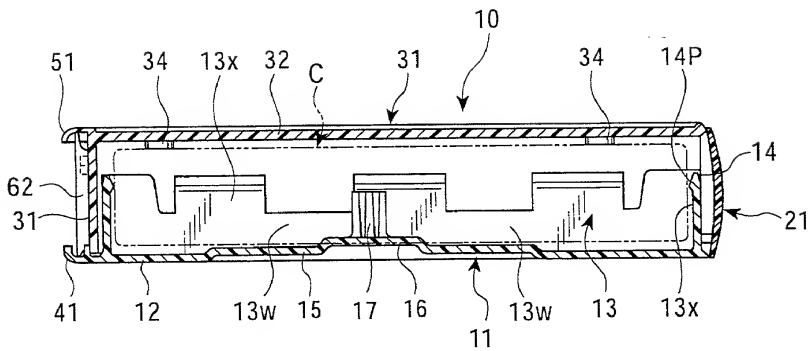


FIG. 5B

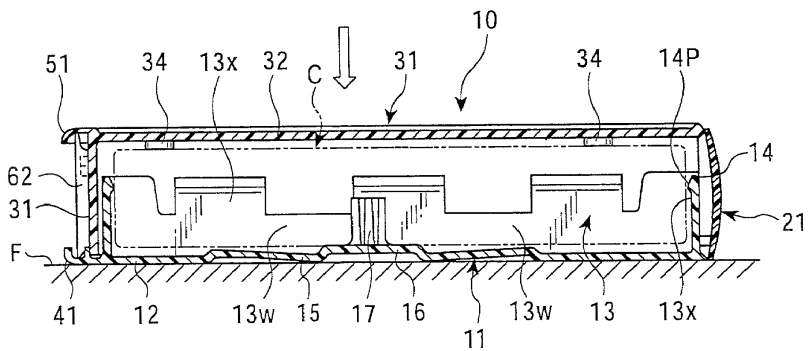


FIG. 6A

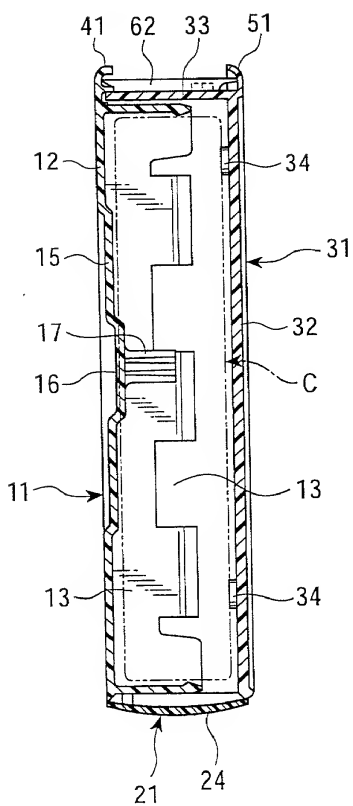


FIG. 6B

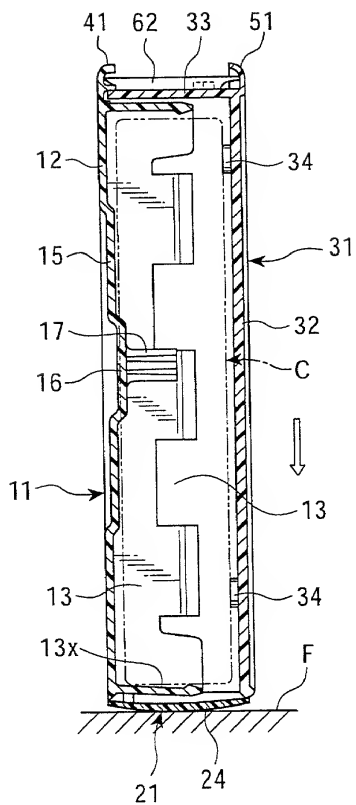


FIG. 7

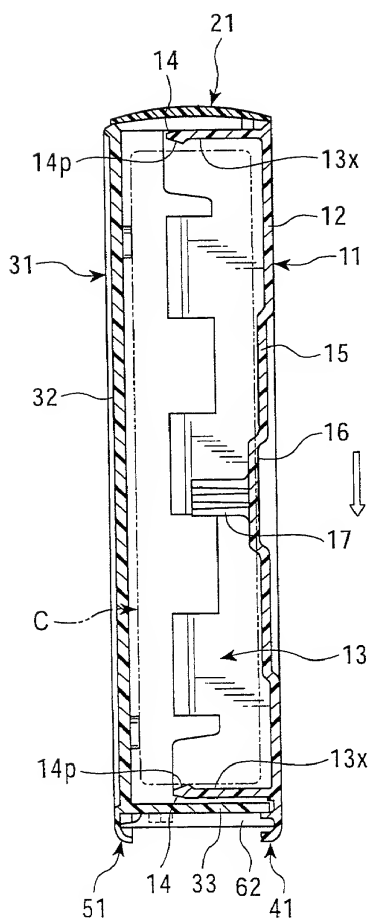


FIG. 8A




FIG. 8B




FIG. 9A




FIG. 9B




FIG. 9C






FIG. 10

FIG. 10 is a perspective view of a rectangular electronic device 10. The device has a top surface 32, a front edge 31, and a bottom edge 12. It features a recessed front bezel 61 and a side bezel 62. Four screws 34 are used to secure the top surface to the main body. The device is shown in an open position, revealing the internal structure.

[illegible]

FIG. 12

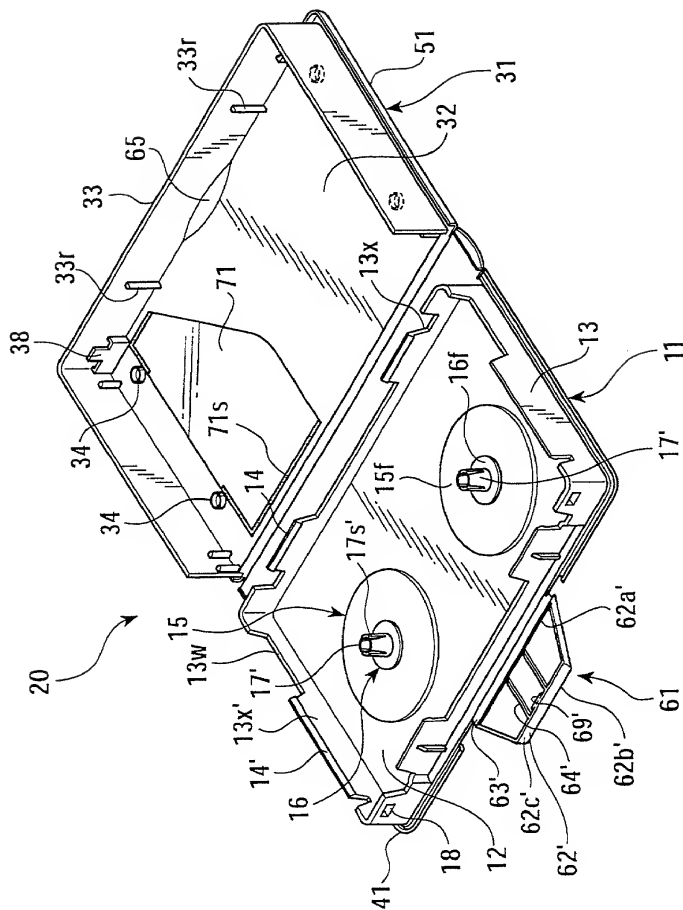


FIG. 13

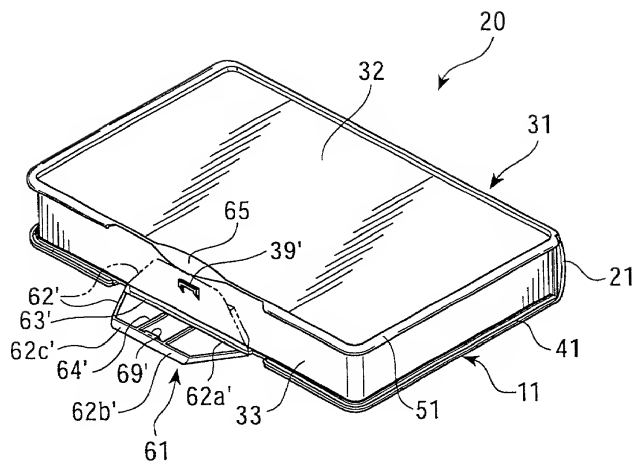


FIG. 14

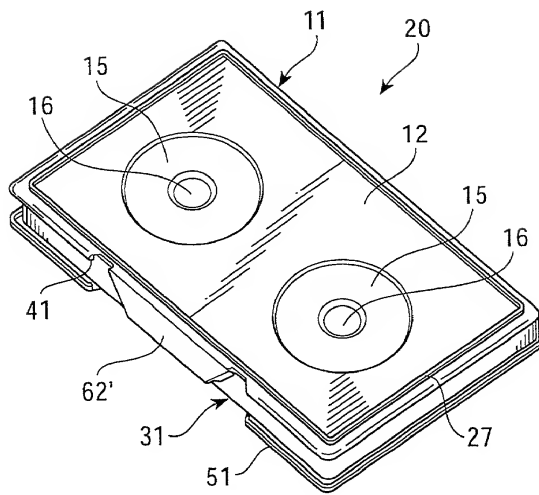


FIG. 15

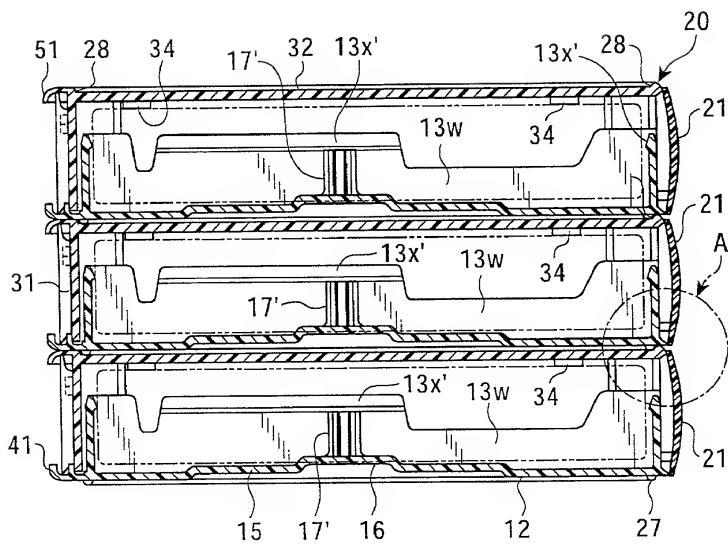


FIG. 16

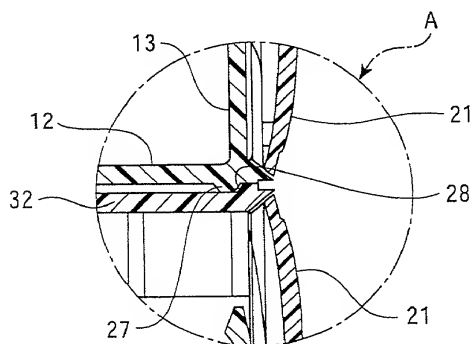


FIG. 17A

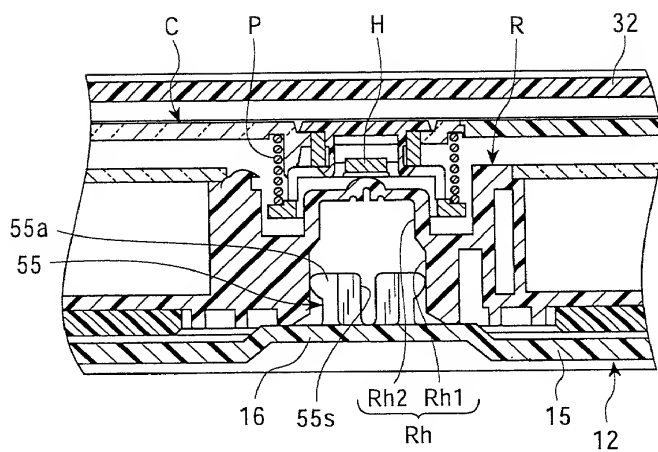


FIG. 17B




FIG. 18B




FIG. 19A

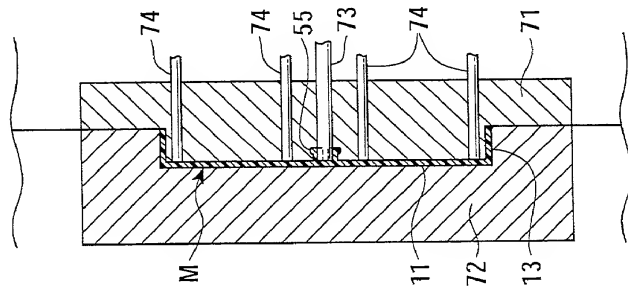


FIG. 19B

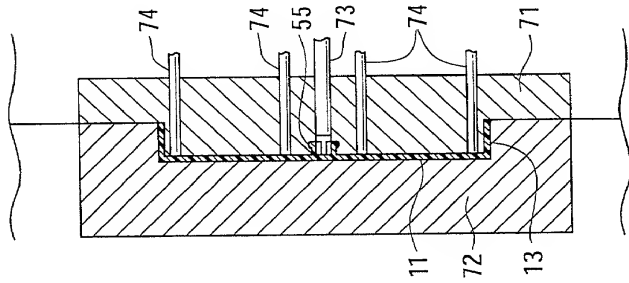


FIG. 19C

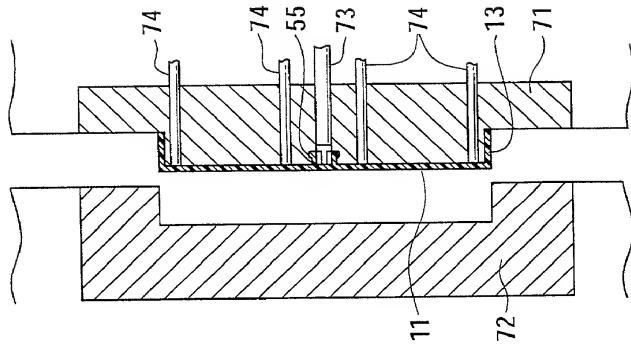




FIG. 20B

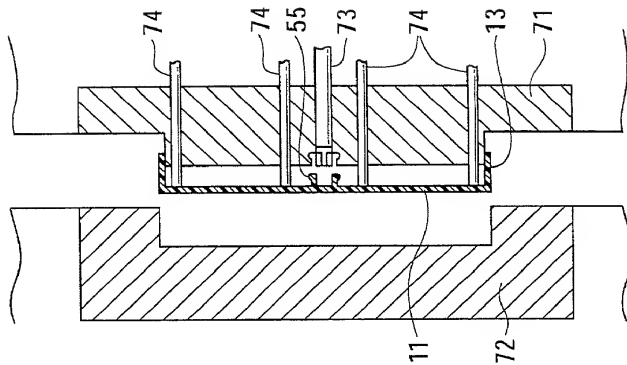


FIG. 20A

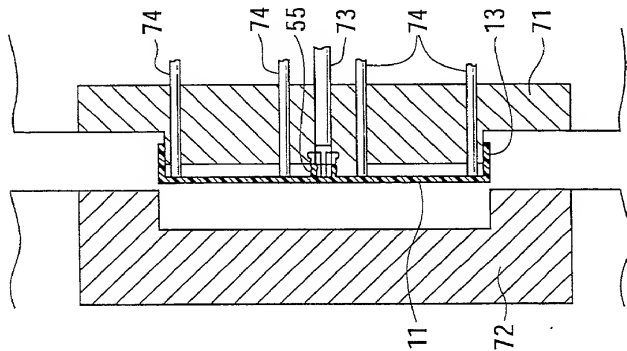


FIG. 21

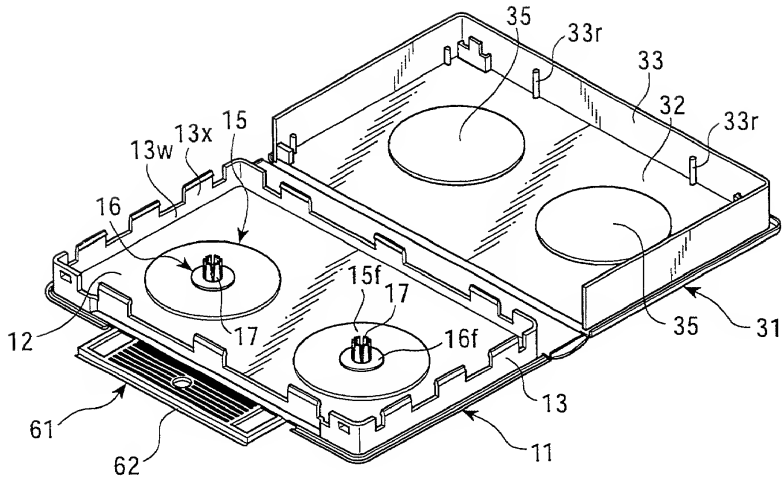


FIG. 22

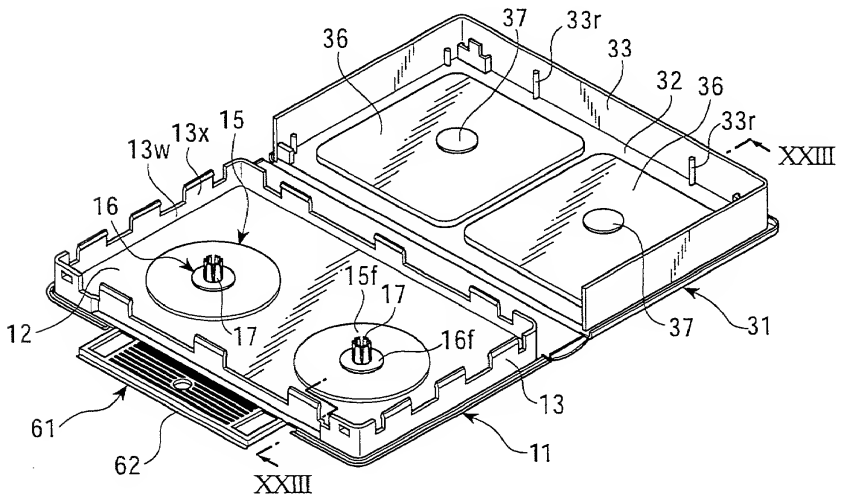


FIG. 23

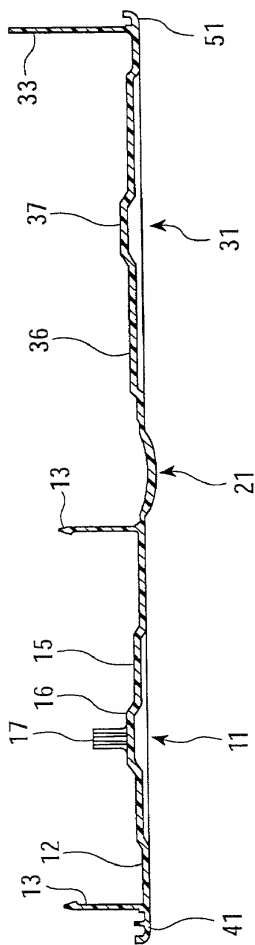


FIG. 24

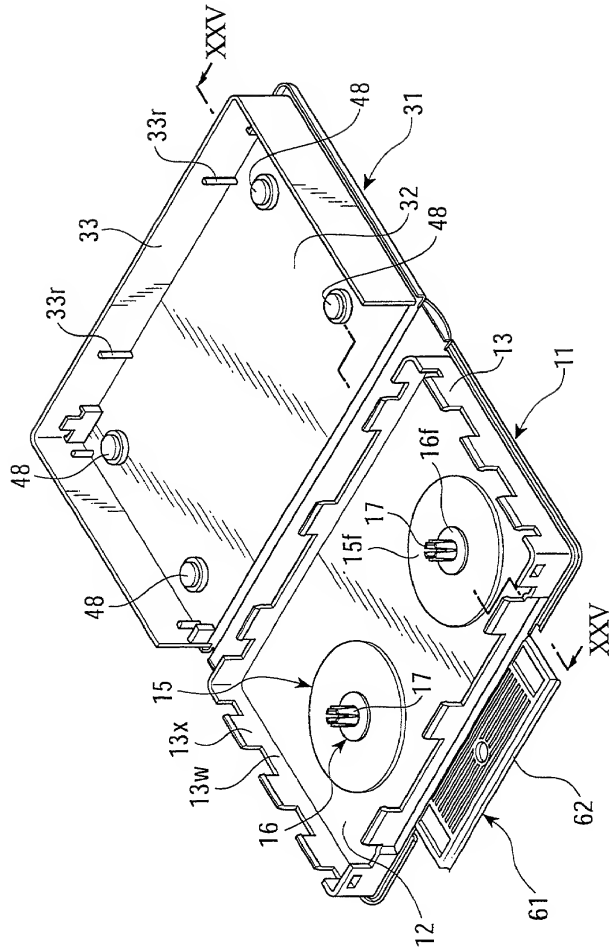


FIG. 25A

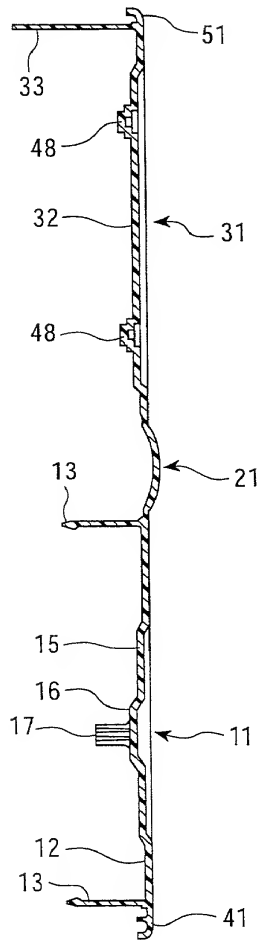


FIG. 25B

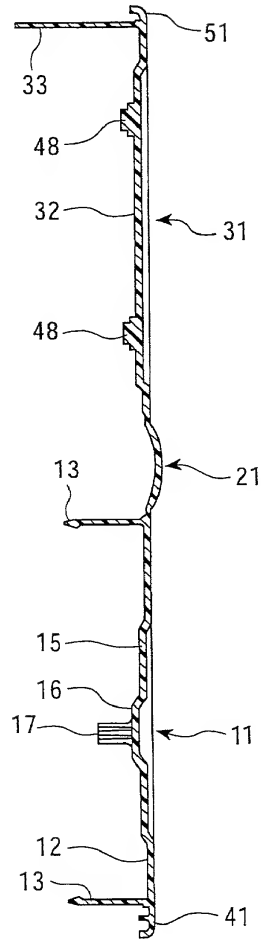


FIG. 26A

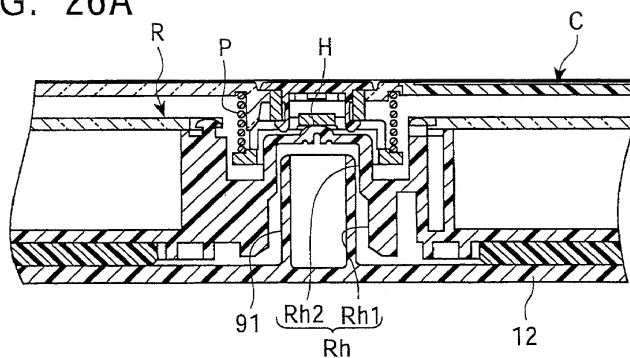


FIG. 26B

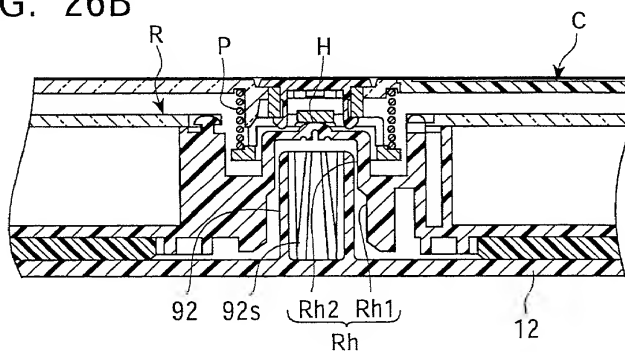


FIG. 26C

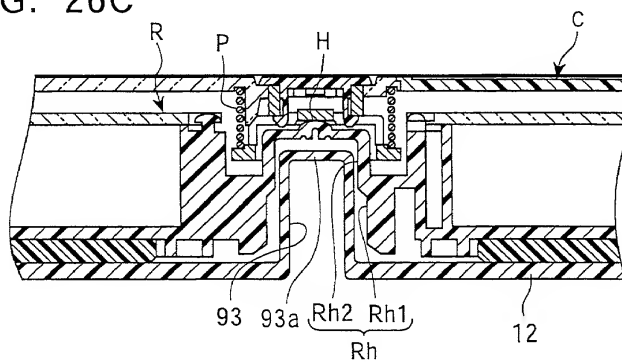


FIG. 27

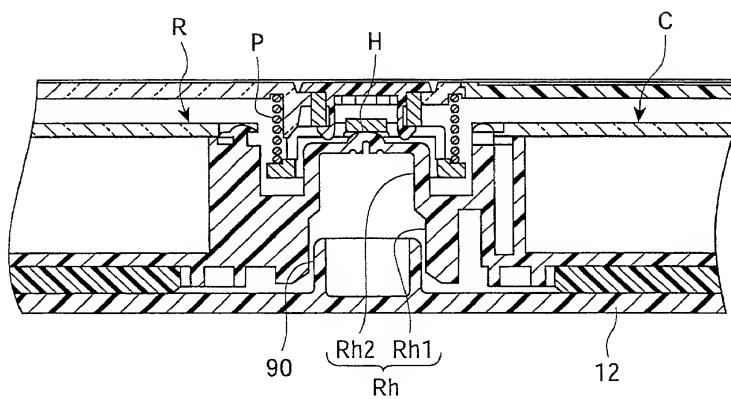


FIG. 28A

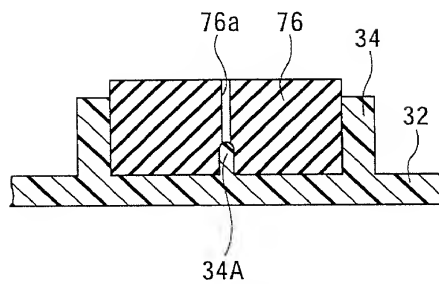


FIG. 28B

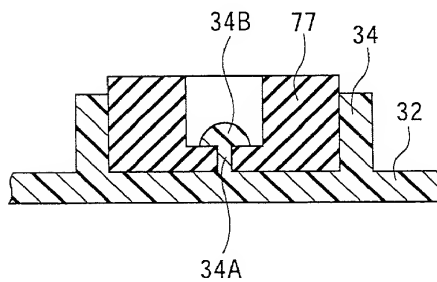




FIG. 29A

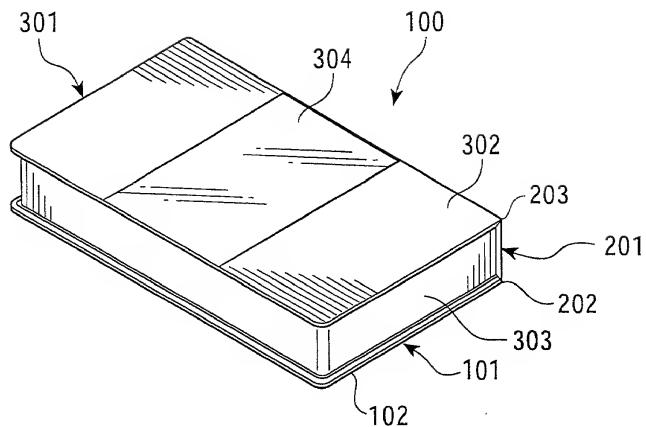


FIG. 29B

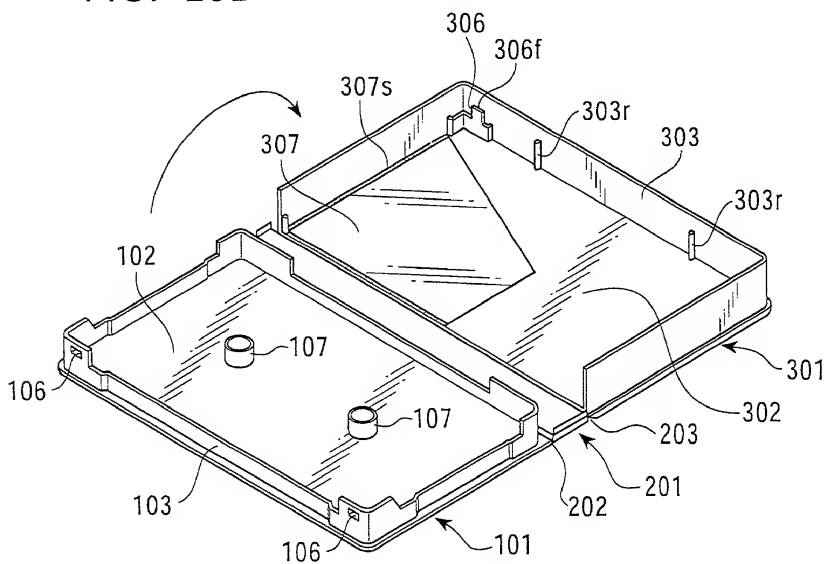


FIG. 30

